Installation Guide

Case components

Removable
140 mm fan tray

Multi-media ports

Dual LED
Power switch
(Blue LED for power)
(Red LED for HDD)

Ventilation holes
in the PCI slots

PSU rack

Removable
2.5" HDD cage

Hardware list
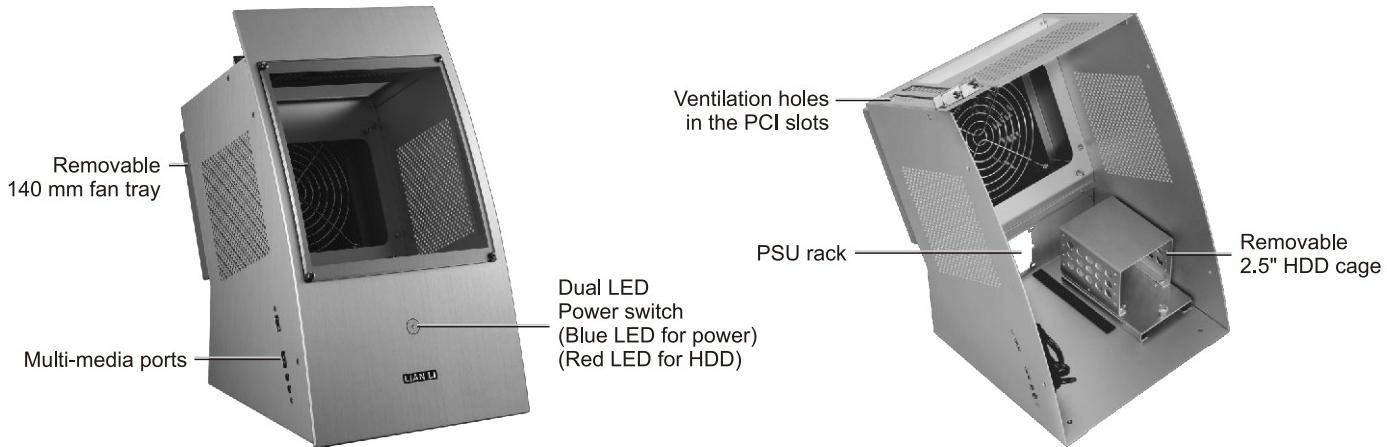
*Extra quantities are spare parts.

|					
	Screws (21) for MB / 2.5" HDD		Screws (5) for PSU mounting		Screw M3 (2) for side panel (spare part)
	USB 3.0 to USB 2.0 converter (1)		Buzzer (1)		Cable ties (2)

Removable front panel
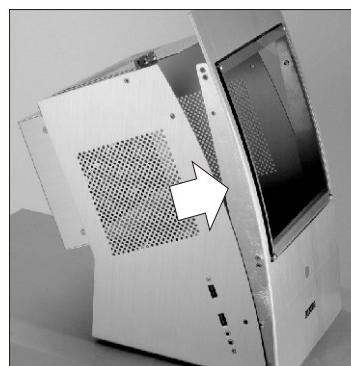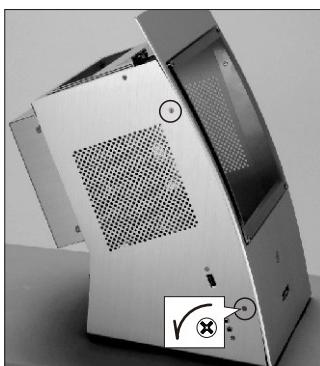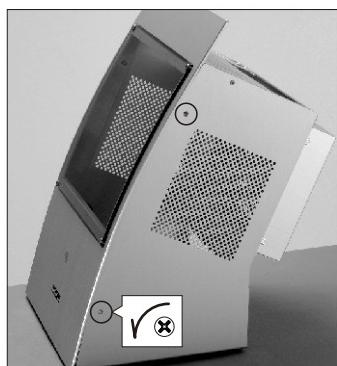
Remove 4 screws, pull the front panel toward yourself.

Removing the fan tray

Loosing 4 thumb screws to remove 140 mm fan tray.

Motherboard installation

Motherboard
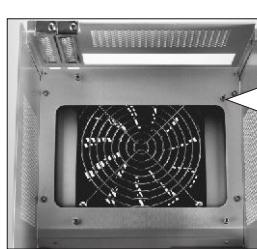
Place the M/B on the stand-off and fastened by the screws.

Cable installation guide

BLACK / WHITE -
BLACK +   POWER SW

BLACK / WHITE -   POWER LED
BLACK +   POWER LED

BLACK / WHITE -
BLACK +   HDD LED

RED+
NC
NC   SPEAKER
Blue

USB 3.0 to USB 2.0 converter

20 1
11 10

VCC   RED 1   2 RED   VCC
D- WHITE   WHITE D-
D+ GREEN   GREEN D+
GND BLACK   BLACK GND
9   10 KEY

USB
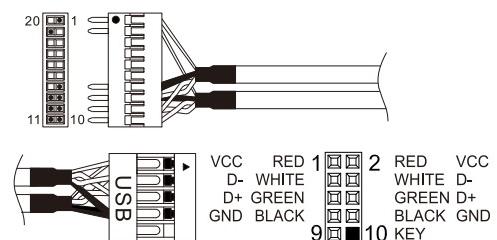
2.5" HDD installation
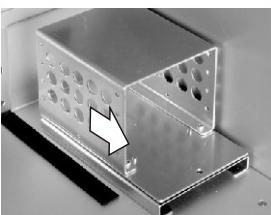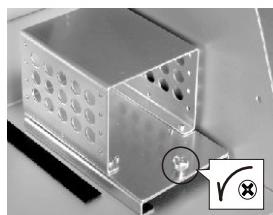
Loose thumb screw.

Slide to release.
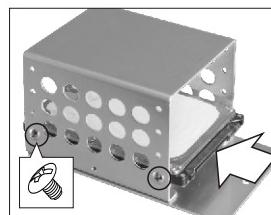
Insert the 2.5" HDD, fasten 4 screws to secure.

PSU installation
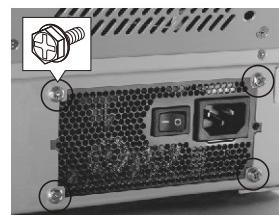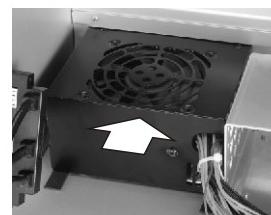
Place the PSU on the stand, and push against the rear panel.

Fasten screws to secure.

I/O port installation

USB 3.0

USB 3.0   EAR   MIC

USB 3.0

Supports motherboard
USB 3.0 20 Pin header

11 10
20 1

FY
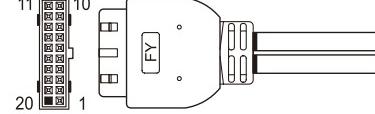
HD AUDIO

Blue 10   9 Green
Black purple 8   7 Key
Yellow 6   5 Orange
Gary 4   3 N.C.
Red 2   1 GND+H.S. TUBE

HD AUDIO